






WARNING: READ THE ASSEMBLING INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE IN-GROUND BENCH SEAT ONLY.

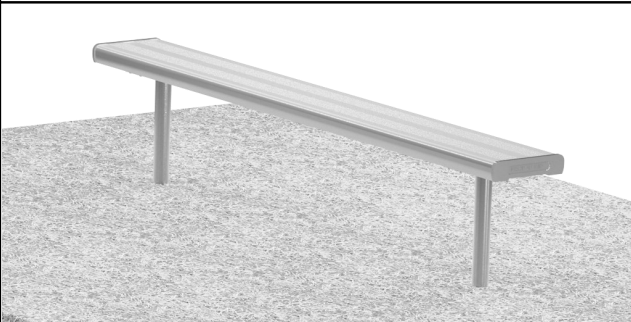

Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two or more people as lifting is involved. Please ensure bolts are only finger-tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the product to the ground.




	ITEM PART	DESCRIPTION	QTY
	IGB1	SEAT FRAME	2
	IGB2	2000 mm.—SEAT ALUMINIUM PLANK	1
	IGB3	M6 x 25 mm. HEXAGONAL HEAD BOLT	8
	IGB4	M6 LOCKNUT	8
2m- IN-GROUND BENCH SEATING (CODE No. FELIG2)			
	 IGB1	 IGB2	 IGB3
			 IGB4

Thank you for purchasing our high quality products. The In-ground Bench Seating has been well manufactured with certified materials, to achieve high reliability and minimum maintenance. It is our commitment to provide you cost-effective solutions for outdoor applications.




1

- A. Place the table plank (IGB2) up side down on a flat surface and attached it to the table frames (IGB1), by using hexagonal bolts (IGB3) and locknuts (IGB4) — finger tighten.
- B. Adjust all bolts properly with a span, wrench and/or any appropriate tool.

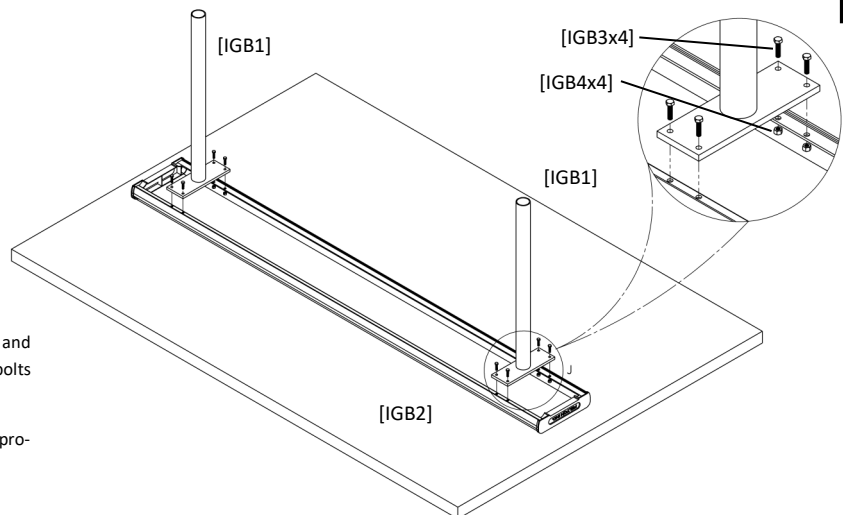

2

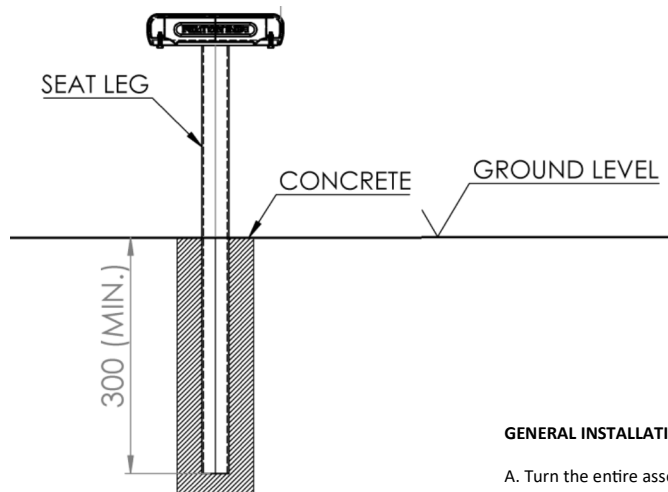

GENERAL INSTALLATION RECOMMENDATIONS:

- A. Turn the entire assembly upright and mark the location of the leg supports, according to the illustration above.
- B. Prepare the leg foundation as necessary. Install seat legs accordingly.
- C. We recommend to place at minimum 300 mm. of the seat legs in concrete.