


**WARNING: READ THE ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE 4 SIDED PEDESTAL PARK SETTING.**



Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two or more people as lifting is involved. Please ensure all bolts are only finger-tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the product to the ground.



ITEM PART	FASTENER DESCRIPTION	QTY	ITEM PART	COMPONENT DESCRIPTION	QTY
FE4P9	M6 x 25mm. HEXAG. HEAD BOLT	64	FE4P1	CENTRAL UPRIGHT	1
FE4P10	M10x120mm. HEX. HEAD BOLT	2	FE4P2	SEATING FRAME / LEGS	4
FE4P11	M10x110mm. HEXAG. HEAD BOLT	8	FE4P3	HORIZONTAL SEAT BRACE—SHORT FIXING PLATES	2
FE4P12	M12x100 mm. HEX. HEAD BOLT	2	FE4P4	HORIZONTAL SEAT BRACE—LONG FIXING PLATES	2
FE4P13	M6 LOCKNUT	64	FE4P5	TABLE FRAME	1
FE4P14	M10 LOCKNUT	16	FE4P6	1000 mm.—TABLE PLANK	4
FE4P15	M12 LOCKNUT	4	FE4P7	900 mm.—SEATING PLANK	4
FE4P16	M10 PLAIN WASHER	24			
FE4P17	M12 PLAIN WASHER	4			

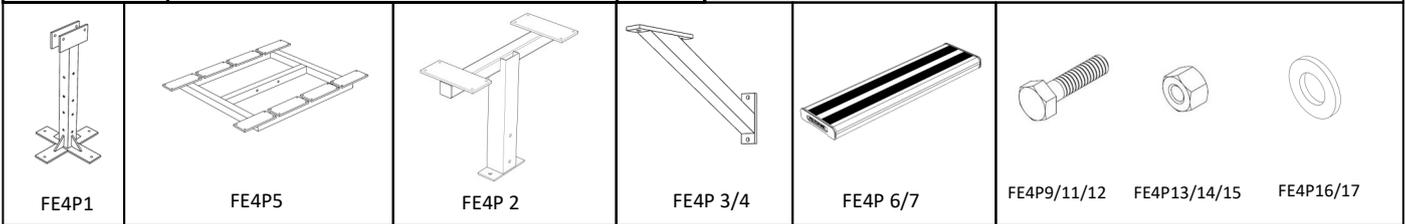

Thank you for purchasing our high quality products. The Interactive 4 Sided pedestal Park Setting has been manufactured with certified materials, to achieve high reliability and minimum maintenance. It is our commitment to provide you cost effective solutions for outdoor applications.

1
2

Lay the 4 Table planks [FE4P6] upside down and flush ends. Place the table frame [FE4P5] on top the table planks and attach it with hex. head bolts [FE4P9] and locknuts [FE4P9] - Finger tighten.

Lay a seat plank [FE4P2] upside down on a flat surface. Have the seat frame [FE4P2] on top and attach it to the seat plank, by using hex. head bolts [FE4P9] and locknuts [FE4P13] - Finger tighten.

**P1**

**WARNING: READ THE ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE 4 SIDED PEDESTAL PARK SETTING.**




Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two or more people as lifting is involved. Please ensure all bolts are only finger-tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the product to the ground.




**3**

Secure the 4 crossbars [FE4P3/4] to a seat leg assembly achieved in the Step 2 correspondingly and secure it with hex. head bolts [FE4P11], locknuts [FE4P14] and washers [FE4P16] - Finger tighten.

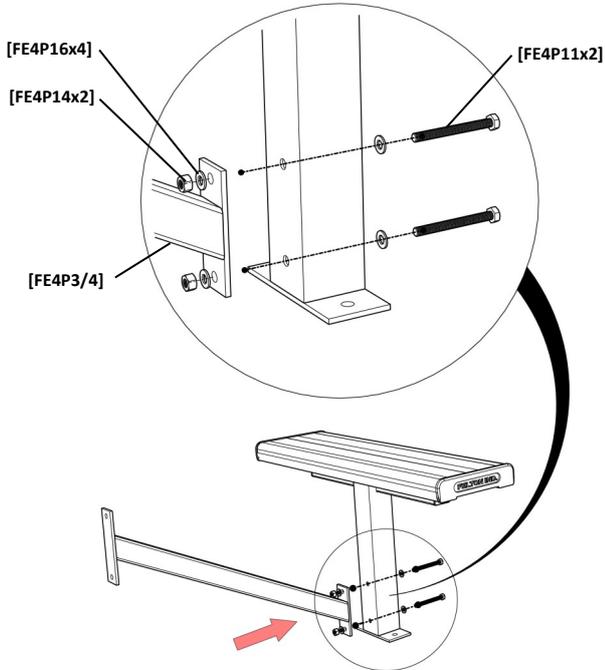


**4**

Secure the 4 assembled components achieved in the step 3, to the central post [FE4P1], by using hex. head bolts [FE4P10], locknuts [FE4P14] and washers [FE4P16] - Finger tighten.

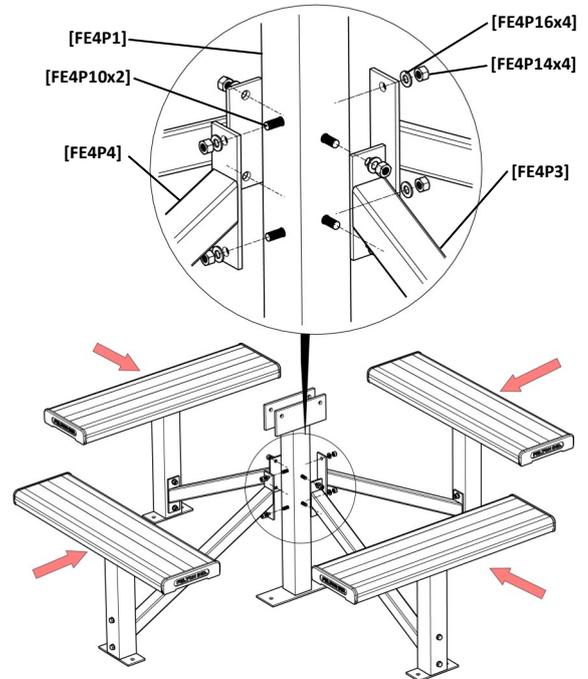


**5**

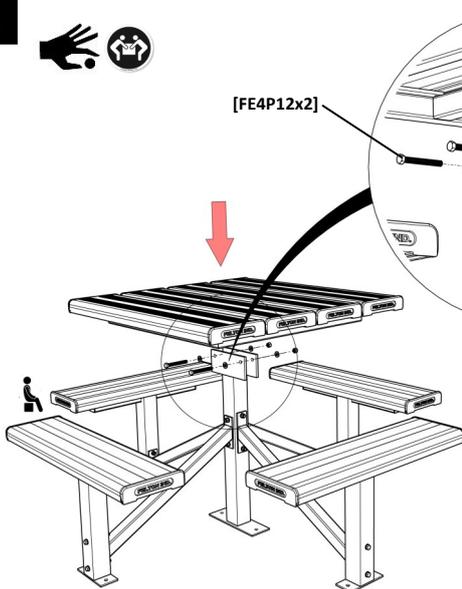

Connect the table bench assembly to the rest of the 4 pedestal park setting, as illustrated. Secure the table frame [FE4P5] to central post fixing plates, by using hexagonal head bolts [FE4P12], locknuts [FE4P15] and washers [FE4P17]- Finger tighten.

**6**

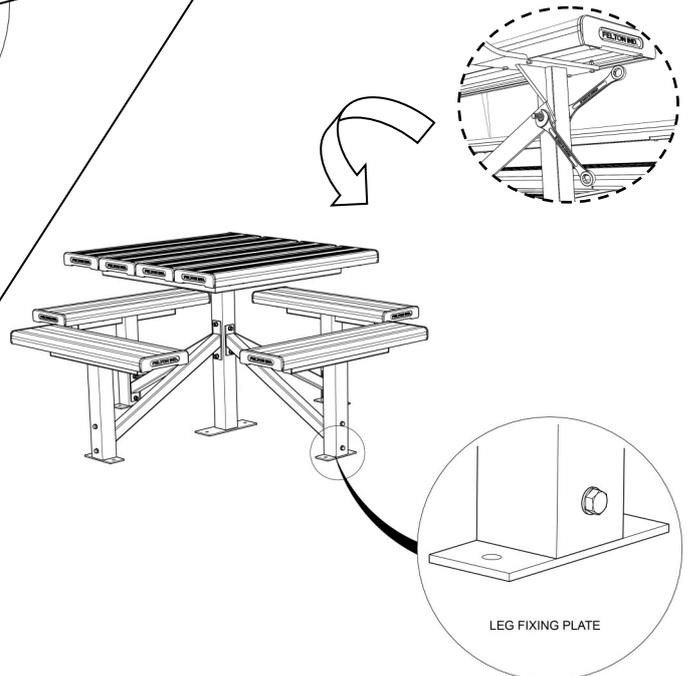

Tight all the bolts with spanner and/or proper tools as necessary.

Fix the 4 sided pedestal park setting to the ground with dyna-bolts.