

WARNING: READ THE ASSEMBLY INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE BBQ SHELTER.




Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two or more people as lifting is involved. Please ensure bolts are only finger tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the Broad Sheltered Park Setting to the ground.




BBQ SHELTER
(CODE No. FESPSH)

ITEM	DESCRIPTION	QTY
PBS1	MAIN FRAME	2
PBS2	TOP BEAM	5
PBS3	COLORBOND ROOFING	1
PBS4	CURVED BEAM	2
PBS5	M12x110 mm. HEX. BOLT	8
PBS6	M12x70 mm. HEX. BOLT	10
PBS7	M12 LOCKNUT	18
PBS8	M12 PLAIN WASHER	36
PBS9	ST 4.8x 16 SELF TAPED SCREWS	55

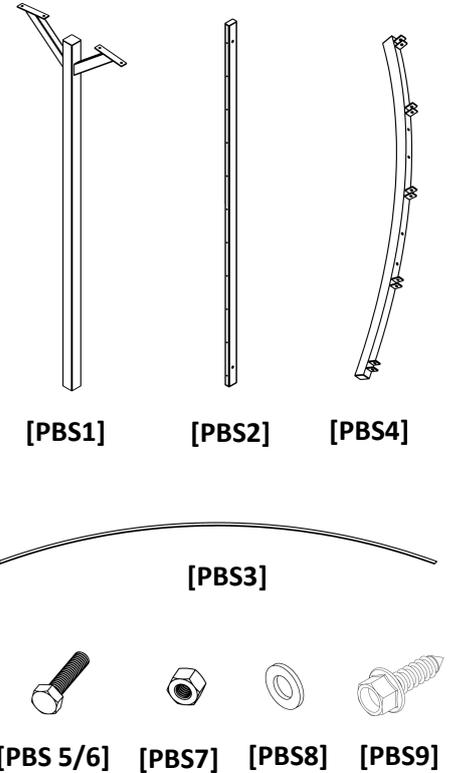


Thank you for purchasing our high quality products. The BBQ Shelter has been manufactured with certified materials to achieve high reliability and minimum maintenance. It is our commitment to provide cost-effective solutions for outdoor applications.

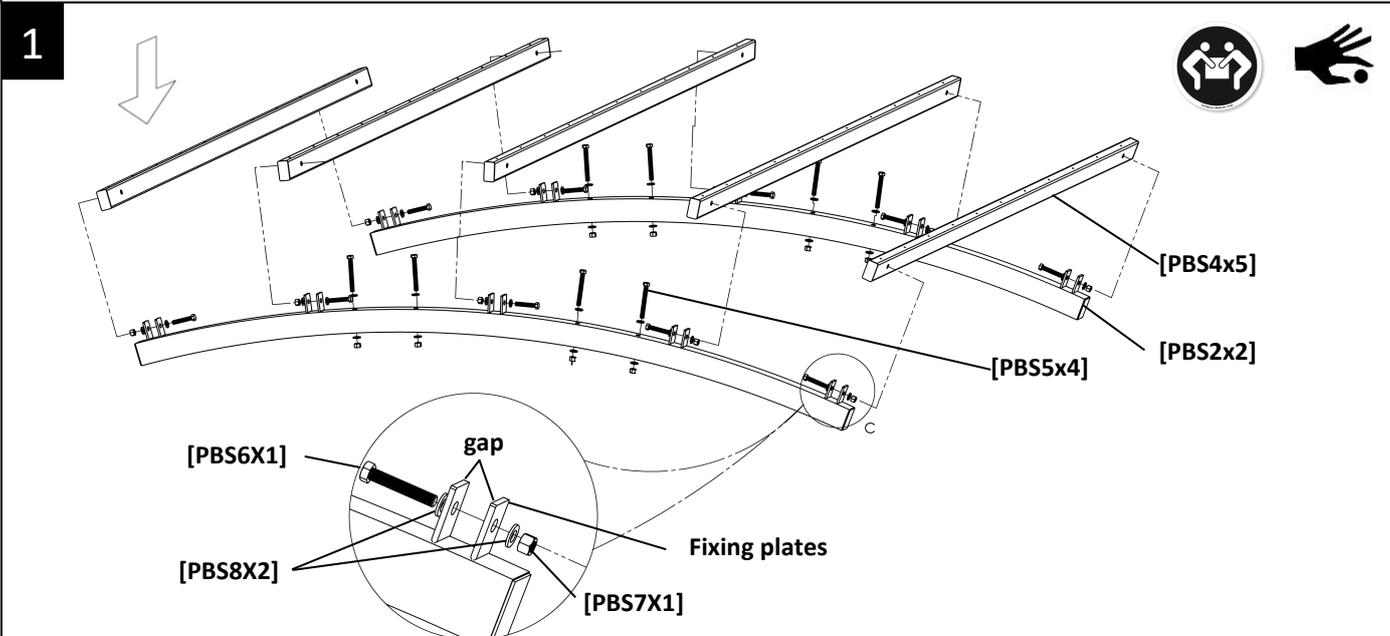

- A. Locate the 2 curved beams [PBS4], as illustrated. Slide the 5 top beams [PBS2] in between the fixing plates installed on to the top beams [PBS2], and fix them to the fixing plates, by using hexagonal head bolts [PBS6], plain washers [PBS8] and locknuts [PBS7] - finger tighten.
- B. **Important!:** Before fixing the Colorbond roofing, please not to forget to pre-install the hexagonal head bolts [PBS5], locknuts [PBS7] and plain washers [PBS8] on to the curvy beams [PBS2]- finger tighten.


(IT CONTINUES ON THE BACK OF THIS SHEET)

2

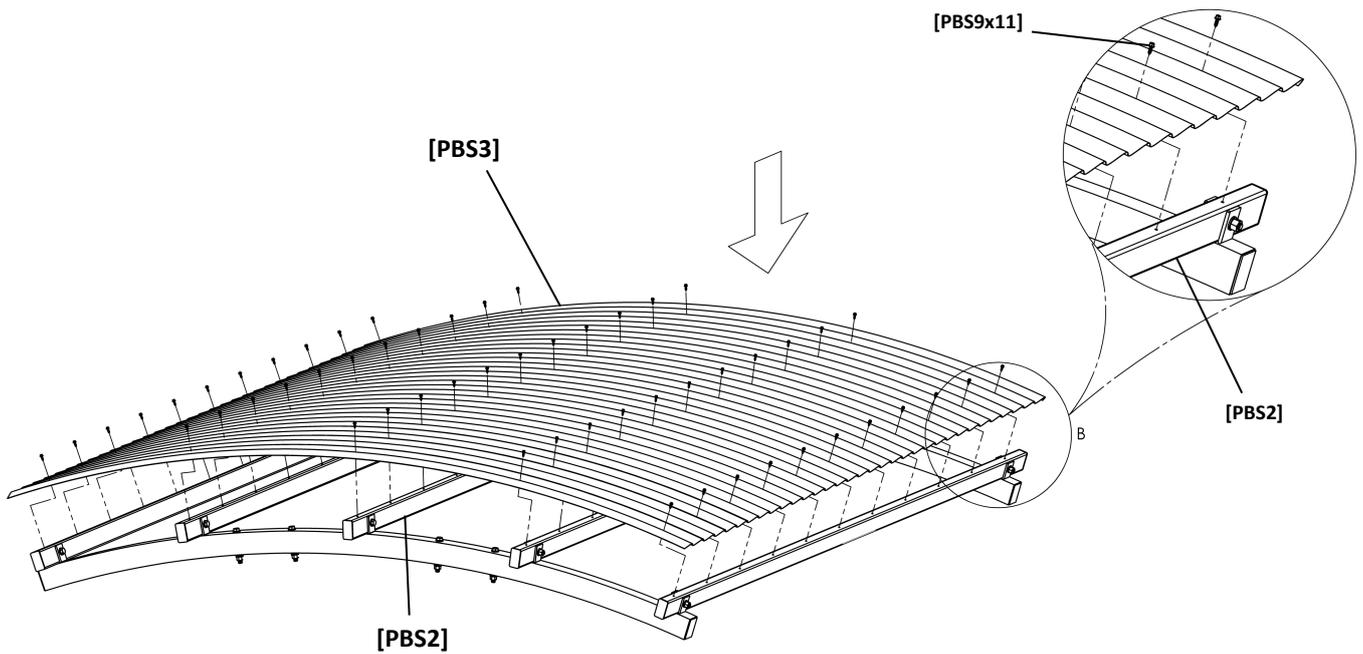


- A. Install the colorbond roofing **[PBS3]** on to the top beams **[PBS2]**, and align it to the centre of the structure correspondingly. Secure the colorbond roofing **[PBS3]** to the top beams **[PBS2]**, by using self-taped screws **[PBS9]** and appropriate tools. Install approximately 11 self taped screws on each top beam, keeping a distance in between them of 240 mm., to guarantee a reliable fixation.
- B. Adjust and tight the whole roof assembly with spanners and appropriate tools.

3

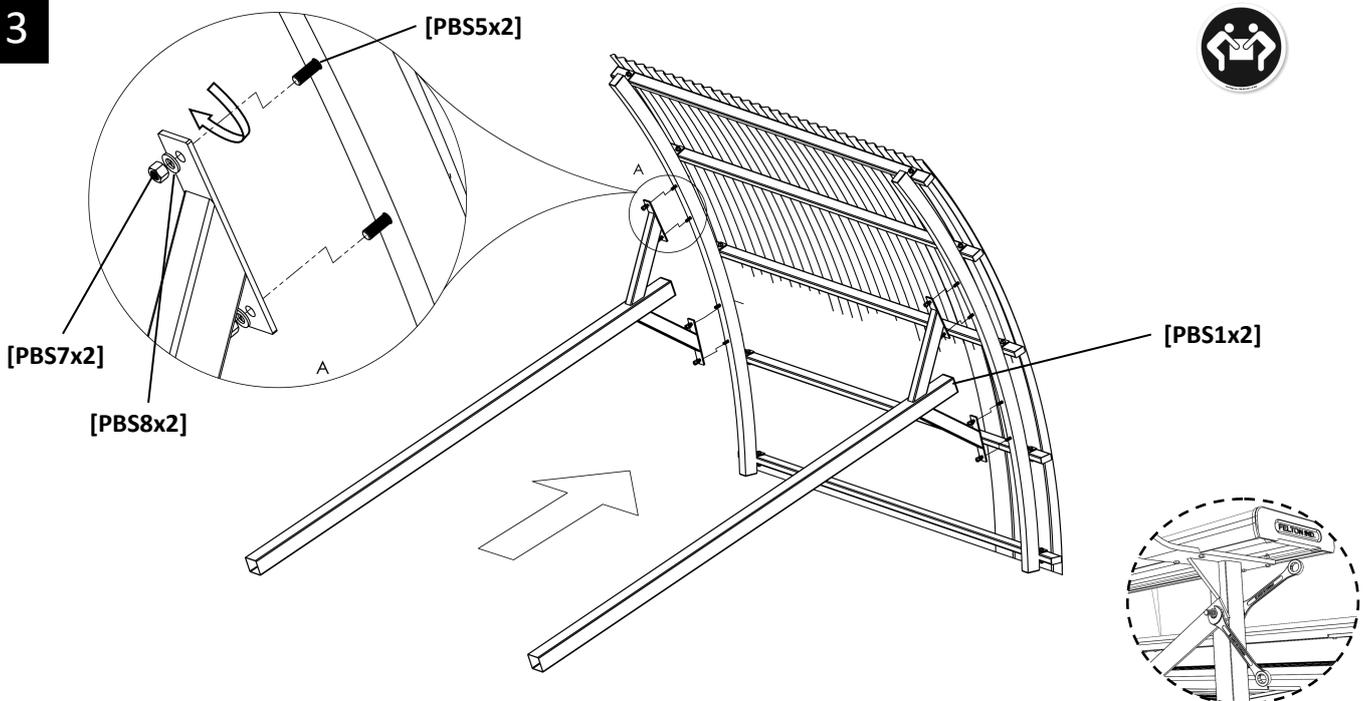

- A. Attach the main frames **[PBS1]** to the roof assembly, by using hexagonal head bolts **[PBS5]**, locknuts **[PBS7]** and plain washers **[PBS8]** - finger tighten.
- B. Adjust and tight the whole structure with spanners and appropriate tools.
- C. Prepare to lift the BBQ shelter and to install it into the ground.

P2

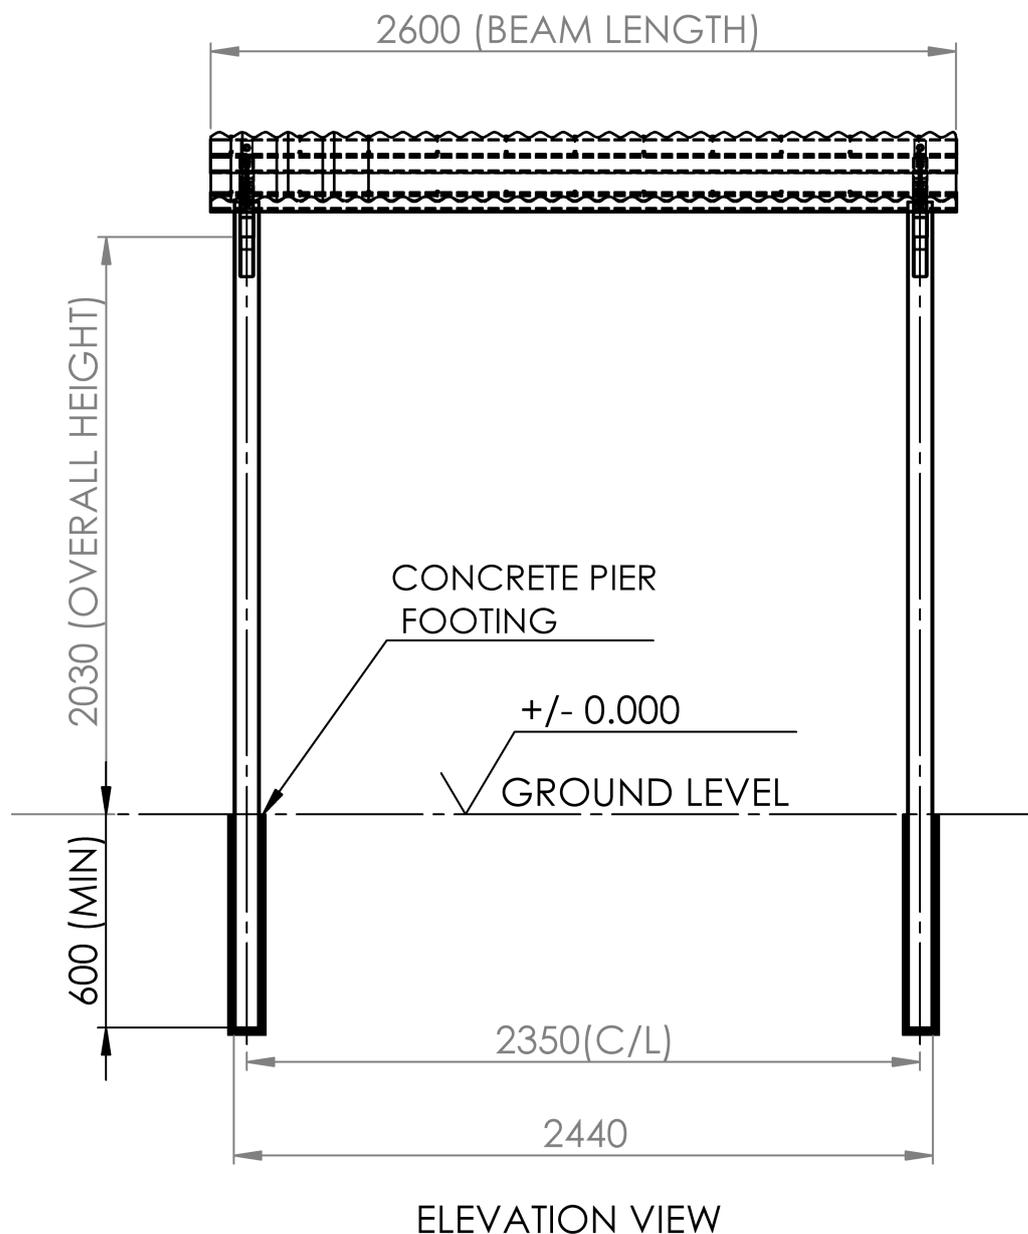

- A. Prepare the BBQ shelter foundation, by digging two holes with a minimum depth of 600 mm.
- B. Install the BBQ shelter legs into ground holes and pour concrete to achieve steady concrete piers and a proper fixation.