



WARNING: READ THE ASSEMBLING INSTRUCTIONS CAREFULLY BEFORE ASSEMBLING THE COMPACT JUMBO PARK SETTING.





Make sure to wear protective gloves and foot protection when installing and assembling this product. Unpack the unit and make sure all the components are included before proceeding. This activity requires two o more people as lifting is involved. Please ensure bolts are only finger-tightened during the assembling process for flexibility in lining up components. Securely tighten the bolts before anchoring the product to the ground.







COMPACT JUMBO PARK SETTING (CODE No. FELCPS)




| ITEM | DESCRIPTION | QTY |
|------|----------------------------------|-----|
| CJS1 | TABLE FRAME | 2 |
| CPS2 | SEAT FRAME | 4 |
| CJS3 | TABLE / SEAT PLANK—1000 mm. | 8 |
| CJS4 | M6 x 25mm. HEXAGONAL HEAD BOLT | 64 |
| CJS5 | M12 x 75 mm. HEXAGONAL HEAD BOLT | 8 |
| CJS6 | M6 LOCKNUT | 64 |
| CJS7 | M12 LOCKNUT | 8 |
| CSJ8 | M12 FLAT WASHER | 16 |

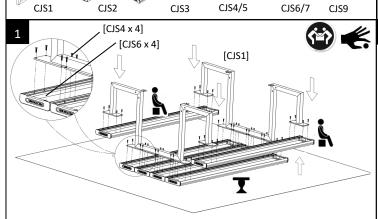




B. install 2 seat planks (CJS3) on the table frame fixing plates (CJS1) as shown— finger tighten.



Install the 4 seat frames (CJS2) on the bottom of the two table frames (CJS1) as shown, secure the assembly by using hexagonal head bolts (CJS5), locknuts (CJS7) and 2 plain washers (CJS8) on both ends-finger tighten.

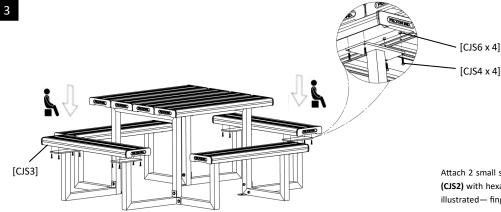





Attach 2 small seat planks (CJS3) on the seat frame top plates (CJS2) with hexagonal head bolts (CJS5) and locknuts (CJS7), as illustrated—finger tighten.

Adjust all fasteners properly, by using span, wrench and/or any appropriate tool.

Fix the Compact Jumbo park setting to the ground, by installing dyna bolts on the main frame lugs **(CJS-1).**

Thank you for purchasing our high quality products. The Compact Jumbo Park setting has been manufactured with certified materials, to achieve high reliability and minimum maintenance. It is our commitment to provide you cost effective solutions for outdoor applications.

